




2015 TIRE PATTERN GUIDE


ALL STEEL RADIAL



ZHONGCE RUBBER GROUP CO., LTD.

www.zc-rubber.com



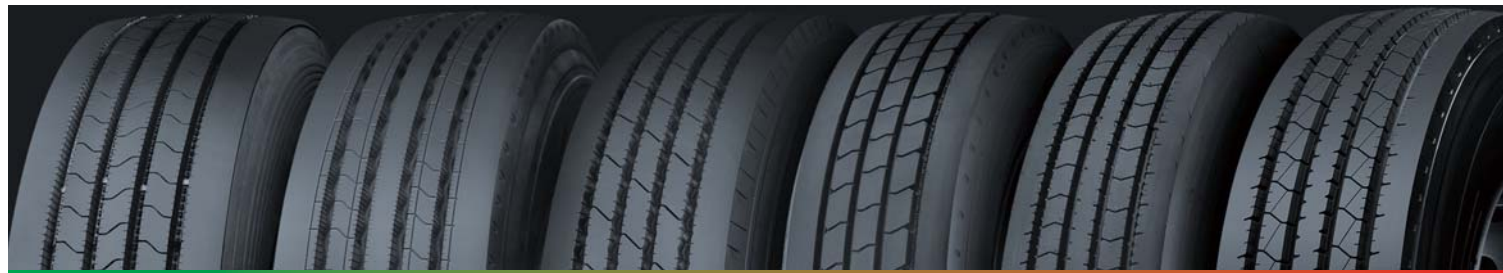

AS668		AZ670		CR976A		CR966		CR960				AS678				
Size	Pattern	Ply Rating	Service Index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure								TT/TL
								(kg)	(LBS)	(kPa)	(PSI)	(kg)	(LBS)	(kPa)	(PSI)	
Wide Base Truck Tires																
385/55R19.5	AT555	H/16	156J	15.0	12.25	919	386	4000	8820	900	131	-	-	-	-	TL
435/50R19.5	AT555	L/20	160J	13.5	14.00	931	438	4500	9920	900	131	-	-	-	-	TL
445/45R19.5	AT556	L/20	160J	14.3	15.00	895	446	4500	9920	900	131	-	-	-	-	TL
415/45R22.5	AT559	L/20	156K	15.5	14.00	946	416	4000	8820	800	116	-	-	-	-	TL
445/50R22.5	AD781	L/20	161L	21.2	14.00	1018	445	4625	10200	830	120	-	-	-	-	TL
445/50R22.5	AT566	L/20	161L	13.1	14.00	1018	445	4625	10200	830	120	-	-	-	-	TL
385/55R22.5	CR966	L/20	160K	15.0	12.25	996	386	4500	9920	900	130	-	-	-	-	TL
385/65R22.5	CR931	J/18	158L	15.5	11.75	1072	389	4250	9370	850	125	-	-	-	-	TL
385/65R22.5	CR976A	J/18	158L	15.5	11.75	1072	389	4250	9370	850	125	-	-	-	-	TL
385/65R22.5	AT557	L/20	160K	18.0	11.75	1072	389	4500	9920	900	130	-	-	-	-	TL
385/65R22.5	AT559	L/20	160K	15.5	11.75	1072	389	4500	9920	900	130	-	-	-	-	TL
385/65R22.5	AT560	L/20	160K	16.0	11.75	1072	389	4500	9920	900	130	-	-	-	-	TL
425/65R22.5	AT557	L/20	165K	18.0	13.00	1124	430	5150	11340	830	120	-	-	-	-	TL
425/65R22.5	AT559	L/20	165K	15.5	13.00	1124	430	5150	11340	830	120	-	-	-	-	TL
425/65R22.5	CR931	L/20	165K	15.0	13.00	1124	430	5150	11340	830	120	-	-	-	-	TL
425/65R22.5	CR976A	L/20	165K	15.0	13.00	1124	430	5150	11340	830	120	-	-	-	-	TL
445/65R22.5	AT557	L/20	169K	18.0	13.00	1150	444	5800	12775	900	130	-	-	-	-	TL
445/65R22.5	AT559	L/20	169K	15.5	13.00	1150	444	5800	12775	900	130	-	-	-	-	TL
445/65R22.5	CR931	L/20	169K	15.0	13.00	1150	444	5800	12775	900	130	-	-	-	-	TL
445/65R22.5	CR976A	L/20	169K	15.0	13.00	1150	444	5800	12775	900	130	-	-	-	-	TL
Medium & Heavy Truck Tires																
8R22.5	CM958	F/12	128/127M	13.5	6.00	935	203	1800	3970	760	110	1750	3860	760	110	TL
8R22.5	CR950	F/12	128/127M	13.5	6.00	935	203	1800	3970	760	110	1750	3860	760	110	TL
8R22.5	CM958	G/14	130/128M	13.5	6.00	935	203	1900	4190	830	120	1800	3970	830	120	TL
8R22.5	CR950	G/14	130/128M	13.5	6.00	935	203	1900	4190	830	120	1800	3970	830	120	TL
9R22.5	CM958	F/12	133/131M	14.0	6.75	974	229	2060	4540	720	105	1950	4300	720	105	TL
9R22.5	CR950	F/12	133/131M	14.0	6.75	974	229	2060	4540	720	105	1950	4300	720	105	TL
9R22.5	CM958	G/14	136/134M	14.0	6.75	974	229	2240	4940	830	120	2120	4675	830	120	TL
9R22.5	CR950	G/14	136/134M	14.0	6.75	974	229	2240	4940	830	120	2120	4675	830	120	TL
10R22.5	CM958	G/14	141/139M	15.0	7.50	1019	254	2575	5675	790	115	2430	5355	790	115	TL
10R22.5	CR950	G/14	141/139M	15.0	7.50	1019	254	2575	5675	790	115	2430	5355	790	115	TL
10R22.5	CM958	H/16	144/142M	15.0	7.50	1019	254	2800	6175	900	130	2650	5840	900	130	TL
10R22.5	CR950	H/16	144/142M	15.0	7.50	1019	254	2800	6175	900	130	2650	5840	900	130	TL
11R22.5	AD757	G/14	144/142L	20.6	8.25	1065	279	2800	6175	720	105	2650	5840	720	105	TL
11R22.5	AS678	G/14	144/142M	14.2	8.25	1054	279	2800	6175	720	105	2650	5840	720	105	TL
11R22.5	CM980	G/14	144/142L	20.6	8.25	1065	279	2800	6175	720	105	2650	5840	720	105	TL
11R22.5	CM983	G/14	144/142L	20.6	8.25	1065	279	2800	6175	720	105	2650	5840	720	105	TL
11R22.5	CR915	G/14	144/142M	11.0	8.25	1054	279	2800	6175	720	105	2650	5840	720	105	TL
11R22.5	CR960	G/14	144/142L	14.2	8.25	1054	279	2800	6175	720	105	2650	5840	720	105	TL
11R22.5	CR960A	G/14	144/142L	14.2	8.25	1054	279	2800	6175	720	105	2650	5840	720	105	TL
11R22.5	CR976A	G/14	144/142M	15.5	8.25	1054	279	2800	6175	720	105	2650	5840	720	105	TL
11R22.5	CR989	G/14	144/142L	14.2	8.25	1054	279	2800	6175	720	105	2650	5840	720	105	TL
11R22.5	AD757	H/16	148/145L	20.6	8.25	1065	279	3150	6940	850	123	2900	6390	850	123	TL
11R22.5	AS668	H/16	148/145L	17.0	8.25	1054	279	3150	6940	850	123	2900	6390	850	123	TL
11R22.5	AS678	H/16	148/145L	14.2	8.25	1054	279	3150	6940	850	123	2900	6390	850	123	TL
11R22.5	AT161	H/16	148/145M	15.5	8.25	1054	279	3150	6940	850	123	2900	6390	850	123	TL
11R22.5	AZ670	H/16	148/145M	16.0	8.25	1054	279	3150	6940	850	123	2900	6390	850	123	TL
11R22.5	AZ676	H/16	148/145M	16.8	8.25	1065	279	3150	6940	850	123	2900	6390	850	123	TL
11R22.5	CB919	H/16	148/145J	23.0	8.25	1065	279	3150	6940	850	123	2900	6390	850	123	TL
11R22.5	CB972	H/16	148/145J	23.0	8.25	1065	279	3150	6940	850	123	2900	6390	850	123	TL
11R22.5	CB981	H/16	148/145L	19.6	8.25	1065	279	3150	6940	850	123	2900	6390	850	123	TL
11R22.5	CM333	H/16	148/145L	19.6	8.25	1065	279	3150	6940	850	123	2900	6390	850	123	TL
11R22.5	CM335	H/16	148/145M	20.6	8.25	1065	279	3150	6940	850	123	2900	6390	850	123	TL



CR989		CR931		AD713		AD733		AD751				AD757				
Size	Pattern	Ply Rating	Service Index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure								TT/TL
								(kg)	(LBS)	(kPa)	(PSI)	(kg)	(LBS)	(kPa)	(PSI)	
11R22.5	CM922	H/16	148/145M	16.0	8.25	1054	279	3150	6940	850	123	2900	6390	850	123	TL
11R22.5	CM958	H/16	148/145L	17.5	8.25	1054	279	3150	6940	850	123	2900	6390	850	123	TL
11R22.5	CM980	H/16	148/145L	20.6	8.25	1065	279	3150	6940	850	123	2900	6390	850	123	TL
11R22.5	CM983	H/16	148/145L	20.6	8.25	1065	279	3150	6940	850	123	2900	6390	850	123	TL
11R22.5	CM985	H/16	148/145L	19.0	8.25	1065	279	3150	6940	850	123	2900	6390	850	123	TL
11R22.5	CM988	H/16	148/145L	18.5	8.25	1065	279	3150	6940	850	123	2900	6390	850	123	TL
11R22.5	CR906	H/16	148/145J	20.0	8.25	1065	279	3150	6940	850	123	2900	6390	850	123	TL
11R22.5	CR915	H/16	148/145M	11.0	8.25	1054	279	3150	6940	850	123	2900	6390	850	123	TL
11R22.5	CR926D	H/16	148/145M	16.8	8.25	1054	279	3150	6940	850	123	2900	6390	850	123	TL
11R22.5	CR960	H/16	148/145M	14.2	8.25	1054	279	3150	6940	850	123	2900	6390	850	123	TL
11R22.5	CR960A	H/16	148/145M	14.2	8.25	1054	279	3150	6940	850	123	2900	6390	850	123	TL
11R22.5	CR960E	H/16	148/145J	23.0	8.25	1065	279	3150	6940	850	123	2900	6390	850	123	TL
11R22.5	CR966	H/16	148/145M	15.0	8.25	1054	279	3150	6940	850	123	2900	6390	850	123	TL
11R22.5	CR976A	H/16	148/145M	15.5	8.25	1054	279	3150	6940	850	123	2900	6390	850	123	TL
11R22.5	CR989	H/16	148/145M	14.2	8.25	1054	279	3150	6940	850	123	2900	6390	850	123	TL
11R22.5	ES660	H/16	148/145L	15.5	8											



CM335		AD710		AD153		CM983		AT566				AT559				
Size	Pattern	Ply Rating	Service Index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure								TT/TL
								(kg)	(LBS)	(kPa)	(PSI)	(kg)	(LBS)	(kPa)	(PSI)	
12R22.5	AD751	J/18	152/149L	23.0	9.00	1096	300	3550	7830	930	135	3250	7160	930	135	TL
12R22.5	AS668	J/18	152/149L	17.5	9.00	1085	300	3550	7830	930	135	3250	7160	930	135	TL
12R22.5	AT161	J/18	152/149L	15.5	9.00	1085	300	3550	7830	930	135	3250	7160	930	135	TL
12R22.5	AT557	J/18	152/149L	17.5	9.00	1085	300	3550	7830	930	135	3250	7160	930	135	TL
12R22.5	AT559	J/18	152/149L	16.5	9.00	1085	300	3550	7830	930	135	3250	7160	930	135	TL
12R22.5	AZ171	J/18	152/149L	16.0	9.00	1085	300	3550	7830	930	135	3250	7160	930	135	TL
12R22.5	AZ670	J/18	152/149L	16.0	9.00	1085	300	3550	7830	930	135	3250	7160	930	135	TL
12R22.5	AZ676	J/18	152/149L	16.0	9.00	1085	300	3550	7830	930	135	3250	7160	930	135	TL
12R22.5	CB919	J/18	152/149F	23.5	9.00	1096	300	3550	7830	930	135	3250	7160	930	135	TL
12R22.5	CB972	J/18	152/149F	24.5	9.00	1096	300	3550	7830	930	135	3250	7160	930	135	TL
12R22.5	CM333	J/18	152/149L	20.0	9.00	1085	300	3550	7830	930	135	3250	7160	930	135	TL
12R22.5	CM335A	J/18	152/149L	20.0	9.00	1096	300	3550	7830	930	135	3250	7160	930	135	TL
12R22.5	CM913A	J/18	152/149L	20.6	9.00	1085	300	3550	7830	930	135	3250	7160	930	135	TL
12R22.5	CM922	J/18	152/149L	16.0	9.00	1085	300	3550	7830	930	135	3250	7160	930	135	TL
12R22.5	CM958	J/18	152/149L	18.0	9.00	1085	300	3550	7830	930	135	3250	7160	930	135	TL
12R22.5	CM961A	J/18	152/149L	22.0	9.00	1096	300	3550	7830	930	135	3250	7160	930	135	TL
12R22.5	CM985	J/18	152/149L	22.0	9.00	1096	300	3550	7830	930	135	3250	7160	930	135	TL
12R22.5	CM988	J/18	152/149L	18.0	9.00	1085	300	3550	7830	930	135	3250	7160	930	135	TL
12R22.5	CR926	J/18	152/149L	16.0	9.00	1085	300	3550	7830	930	135	3250	7160	930	135	TL
12R22.5	CR931	J/18	152/149L	15.5	9.00	1085	300	3550	7830	930	135	3250	7160	930	135	TL
12R22.5	CR960A	J/18	152/149L	15.5	9.00	1085	300	3550	7830	930	135	3250	7160	930	135	TL
12R22.5	CR966	J/18	152/149L	15.5	9.00	1085	300	3550	7830	930	135	3250	7160	930	135	TL
12R22.5	CR976A	J/18	152/149L	15.5	9.00	1085	300	3550	7830	930	135	3250	7160	930	135	TL
12R22.5	ES660	J/18	152/149L	15.5	9.00	1085	300	3550	7830	930	135	3250	7160	930	135	TL
12R22.5	ET550	J/18	152/149L	14.5	9.00	1085	300	3550	7830	930	135	3250	7160	930	135	TL
12R22.5	MD738	J/18	152/149L	20.6	9.00	1085	300	3550	7830	930	135	3250	7160	930	135	TL
13R22.5	AS668	J/18	156/151K	18.0	9.75	1124	320	4000	8820	875	128	3450	7610	875	128	TL
13R22.5	CM923	J/18	156/151K	20.0	9.75	1124	320	4000	8820	875	128	3450	7610	875	128	TL
13R22.5	CM958	J/18	156/151K	20.0	9.75	1124	320	4000	8820	875	128	3450	7610	875	128	TL
13R22.5	CR926	J/18	156/151K	16.0	9.75	1124	320	4000	8820	875	128	3450	7610	875	128	TL
13R22.5	ET550	J/18	156/151K	16.0	9.75	1124	320	4000	8820	875	128	3450	7610	875	128	TL
255/70R22.5	AZ670	H/16	140/137M	15.0	7.50	930	255	2500	5510	830	120	2300	5070	830	120	TL
255/70R22.5	CM958	H/16	140/137L	15.0	7.50	930	255	2500	5510	830	120	2300	5070	830	120	TL
255/70R22.5	CR976A	H/16	140/137M	14.5	7.50	930	255	2500	5510	830	120	2300	5070	830	120	TL
275/70R22.5	CR906	H/16	148/145J	20.0	8.25	964	276	3150	6940	900	130	2900	6395	900	130	TL
275/70R22.5	CR960E	H/16	148/145J	22.0	8.25	964	276	3150	6940	900	130	2900	6395	900	130	TL
275/70R22.5	CR976A	H/16	148/145M	14.0	8.25	958	276	3150	6940	900	130	2900	6395	900	130	TL
275/70R22.5	CR906	J/18	152/148F	20.0	8.25	964	276	3550	7830	930	135	3150	6940	930	135	TL
275/70R22.5	CR960E	J/18	152/148J	22.0	8.25	964	276	3550	7830	930	135	3150	6940	930	135	TL
275/70R22.5	CR976A	J/18	152/148J	14.0	8.25	958	276	3550	7830	930	135	3150	6940	930	135	TL
275/70R22.5	MD738	J/18	152/148J	18.0	8.25	964	276	3550	7830	930	135	3150	6940	930	135	TL
275/80R22.5	CR976A	H/16	149/146M	14.0	8.25	1012	276	3250	7165	850	123	3000	6610	850	123	TL
295/80R22.5	AD153	H/16	150/147M	19.0	9.00	1050	298	3350	7390	830	120	3075	6780	830	120	TL
295/80R22.5	AD156	H/16	150/147M	19.0	9.00	1050	298	3350	7390	830	120	3075	6780	830	120	TL
295/80R22.5	AD733	H/16	150/147M	20.6	9.00	1050	298	3350	7390	830	120	3075	6780	830	120	TL
295/80R22.5	AS668	H/16	150/147M	16.0	9.00	1044	298	3350	7390	830	120	3075	6780	830	120	TL
295/80R22.5	AT161	H/16	150/147M	15.0	9.00	1044	298	3350	7390	830	120	3075	6780	830	120	TL
295/80R22.5	AT559	H/16	150/147M	15.5	9.00	1044	298	3350	7390	830	120	3075	6780	830	120	TL
295/80R22.5	AZ171	H/16	150/147M	16.0	9.00	1044	298	3350	7390	830	120	3075	6780	830	120	TL
295/80R22.5	AZ670	H/16	150/147M	16.0	9.00	1044	298	3350	7390	830	120	3075	6780	830	120	TL
295/80R22.5	AZ676	H/16	150/147M	16.0	9.00	1044	298	3350	7390	830	120	3075	6780	830	120	TL
295/80R22.5	CM922	H/16	150/147M	16.0	9.00	1044	298	3350	7390	830	120	3075	6780	830	120	TL
295/80R22.5	CM958	H/16	150/147M	18.0	9.00	1044	298	3350	7390	830	120	3075	6780	830	120	TL
295/80R22.5	CM961	H/16	150/147M	20.6	9.00	1050	298	3350	7390	830	120	3075	6780	830	120	TL



CR915		AT161		ES660		CR950		CM958				CR960A				
Size	Pattern	Ply Rating	Service Index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure								TT/TL
								(kg)	(LBS)	(kPa)	(PSI)	(kg)	(LBS)	(kPa)	(PSI)	
295/80R22.5	CR906	H/16	150/147M	19.0	9.00	1050	298	3350	7390	830	120	3075	6780	830	120	TL
295/80R22.5	CR926D	H/16	150/147L	16.0	9.00	1044	298	3350	7390	830	120	3075	6780	830	120	TL
295/80R22.5	CR931	H/16	150/147M	15.0	9.00	1044	298	3350	7390	830	120	3075	6780	830	120	TL
295/80R22.5	CR960	H/16	150/147M	15.0	9.00	1044	298	3350	7390	830	120	3075	6780	830	120	TL
295/80R22.5	CM997	H 16	150/147K	20.6	9.00	1050	298	3350	7390	830	120	3075	6780	830	120	TL
295/80R22.5	CR960E	H/16	150/147J	23.0	9.00	1050	298	3350	7390	830	120	3075	6780	830	120	TL
295/80R22.5	CR966	H/16	150/147M	15.0	9.00	1044	298	3350	7390	830	120	3075	6780	830	120	TL
295/80R22.5	CR976A	H/16	150/147M	15.0	9.00	1044	298	3350	7390	830	120	3075	6780	830	120	TL
295/80R22.5	ES660	H/16	150/147M	16.5	9.00	1044	298	3350	7390	830	120	3075	6780	830	120	TL
295/80R22.5	MD738	H/16	150/147L	20.6	9.00	1050	298	3350	7390	830	120	3075	6780	830	120	TL
295/80R22.5	AD153	J/18	152/149L	19.0	9.00	1050	298	3550	7830	900	131	3250	7160	900	131	TL
295/80R22.5	AD156	J/18	152/149M	19.0	9.00	1050	298	3550	7830	900	131	3250	7160	900	131	TL
295/80R22.5	AD733	J/18	152/149L	20.6	9.00	1050	298	3550	7830	900	131	3250	7160	900	131	TL
295/80R22.5	AS668	J/18	152/149M	16.0	9.00	1044	298	3550	7830	900	131	3250	7160	900	131	TL
295/80R22.5	AT161	J/18	152/149M	15.0	9.00	1044	298	3550	7830	900	131	3250	7160	900	131	TL
295/80R22.5	AT559	J/18	152/149L	15.5	9.00	1044	298	3550	7830	900	131	3250	7160	900	131	TL
295/80R22.5	AZ171	J/18	152/149M	16.0	9.00	1044	298	3550	7830	900	131	3250	7160	900	131	TL
295/80R22.5	AZ670	J/18	152/149M	16.0	9.00	1044	298	3550	7830	900	131	3250	7160	900	131	TL
295/80R22.5	AZ676	J/18	152/149L	16.0	9.00	1044	298	3550	7830	900	131	3250	7160	900	131	TL



MD752		CM912		CM922		CM938		AZ171				CM333				
Size	Pattern	Ply Rating	Service Index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure								TT/TL
								(kg)	(LBS)	(kPa)	(PSI)	(kg)	(LBS)	(kPa)	(PSI)	
315/80R22.5	CR960A	J/18	154/151M	15.0	9.00	1076	312	3750	8270	830	120	3450	7610	830	120	TL
315/80R22.5	CR966	J/18	154/151M	16.0	9.00	1076	312	3750	8270	830	120	3450	7610	830	120	TL
315/80R22.5	CR976A	J/18	154/151M	16.0	9.00	1076	312	3750	8270	830	120	3450	7610	830	120	TL
315/80R22.5	ES660	J/18	154/151M	15.5	9.00	1076	312	3750	8270	830	120	3450	7610	830	120	TL
315/80R22.5	ET550	J/18	154/151M	15.0	9.00	1076	312	3750	8270	830	120	3450	7610	830	120	TL
315/80R22.5	MD752	J/18	154/151M	18.0	9.00	1082	312	3750	8270	830	120	3450	7610	830	120	TL
315/80R22.5	MD777	J/18	154/151L	23.0	9.00	1082	312	3750	8270	830	120	3450	7610	830	120	TL
315/80R22.5	AD710A	L/20	157/154K	20.6	9.00	1082	312	4125	9090	900	130	3750	8270	900	130	TL
315/80R22.5	AT557	L/20	157/154K	17.5	9.00	1076	312	4125	9090	900	130	3750	8270	900	130	TL
315/80R22.5	AZ171	L/20	157/154K	16.0	9.00	1076	312	4125	9090	900	130	3750	8270	900	130	TL
315/80R22.5	CM333	L/20	157/154K	20.6	9.00	1082	312	4125	9090	900	130	3750	8270	900	130	TL
315/80R22.5	CM335	L/20	157/154K	20.6	9.00	1082	312	4125	9090	900	130	3750	8270	900	130	TL
315/80R22.5	CM913A	L/20	157/154K	19.0	9.00	1082	312	4125	9090	900	130	3750	8270	900	130	TL
315/80R22.5	CM923	L/20	157/154K	20.0	9.00	1082	312	4125	9090	900	130	3750	8270	900	130	TL
315/80R22.5	CM958	L/20	157/154K	18.0	9.00	1082	312	4125	9090	900	130	3750	8270	900	130	TL
315/80R22.5	CM961	L/20	157/154K	20.6	9.00	1082	312	4125	9090	900	130	3750	8270	900	130	TL
315/80R22.5	CM985	L/20	157/154K	22.0	9.00	1082	312	4125	9090	900	130	3750	8270	900	130	TL
315/80R22.5	CR926B	L/20	157/154K	16.5	9.00	1076	312	4125	9090	900	130	3750	8270	900	130	TL
315/80R22.5	CR960	L/20	157/154K	15.0	9.00	1076	312	4125	9090	900	130	3750	8270	900	130	TL
315/80R22.5	CR960A	L/20	157/154K	15.0	9.00	1076	312	4125	9090	900	130	3750	8270	900	130	TL
315/80R22.5	CR966	L/20	157/154K	16.0	9.00	1076	312	4125	9090	900	130	3750	8270	900	130	TL
315/80R22.5	CR976A	L/20	157/154K	16.0	9.00	1076	312	4125	9090	900	130	3750	8270	900	130	TL
295/60R22.5	CM335	H/16	144/141M	19.0	9.00	926	292	2800	6175	830	120	2575	5675	830	120	TL
295/60R22.5	CR966	H/16	144/141M	15.0	9.00	926	292	2800	6175	830	120	2575	5675	830	120	TL
295/60R22.5	CM335	J/18	150/147K	19.0	9.00	926	292	3350	7390	900	131	3075	6780	900	131	TL
295/60R22.5	CR966	J/18	150/147L	15.0	9.00	926	292	3350	7390	900	131	3075	6780	900	131	TL
315/60R22.5	CM335	J/18	152/148M	18.0	9.75	950	313	3550	7830	900	130	3150	6940	900	130	TL
315/60R22.5	CR966	J/18	152/148M	15.0	9.75	950	313	3550	7830	900	130	3150	6940	900	130	TL
315/70R22.5	AD156	L/20	154/150L	18.0	9.00	1020	312	3750	8250	900	130	3350	7390	900	130	TL
315/70R22.5	CM335	L/20	154/150L	18.0	9.00	1020	312	3750	8270	900	130	3350	7390	900	130	TL
315/70R22.5	CM985	L/20	154/150L	20.5	9.00	1020	312	3750	8270	900	130	3350	7390	900	130	TL
315/70R22.5	CR960A	L/20	154/150L	15.0	9.00	1014	312	3750	8270	900	130	3350	7390	900	130	TL
295/75R22.5	AD757	G/14	144/141L	20.6	9.00	1020	298	2800	6175	760	110	2575	5675	760	110	TL
295/75R22.5	AS678	G/14	144/141L	14.2	9.00	1014	298	2800	6175	760	110	2575	5675	760	110	TL
295/75R22.5	CM980	G/14	144/141L	20.6	9.00	1020	298	2800	6175	760	110	2575	5675	760	110	TL
295/75R22.5	CM983	G/14	144/141L	20.6	9.00	1020	298	2800	6175	760	110	2575	5675	760	110	TL
295/75R22.5	CR915	G/14	144/141M	11.0	9.00	1014	298	2800	6175	760	110	2575	5675	760	110	TL
295/75R22.5	CR960A	G/14	144/141L	14.2	9.00	1014	298	2800	6175	760	110	2575	5675	760	110	TL
295/75R22.5	CR989	G/14	144/141L	14.2	9.00	1014	298	2800	6175	760	110	2575	5675	760	110	TL
11R24.5	AD757	G/14	146/143L	20.6	8.25	1116	279	3000	6610	720	105	2725	6005	720	105	TL
11R24.5	AS678	G/14	146/143L	14.2	8.25	1104	279	3000	6610	720	105	2725	6005	720	105	TL
11R24.5	CB972	G/14	146/143F	23.0	8.25	1116	279	3000	6610	720	105	2725	6005	720	105	TL
11R24.5	CM973	G/14	146/143L	15.0	8.25	1104	279	3000	6610	720	105	2725	6005	720	105	TL
11R24.5	CM980	G/14	146/143L	20.6	8.25	1116	279	3000	6610	720	105	2725	6005	720	105	TL
11R24.5	CM983	G/14	146/143L	20.6	8.25	1116	279	3000	6610	720	105	2725	6005	720	105	TL
11R24.5	CR926D	G/14	146/143L	16.8	8.25	1104	279	3000	6610	720	105	2725	6005	720	105	TL
11R24.5	CR960	G/14	146/143L	14.2	8.25	1104	279	3000	6610	720	105	2725	6005	720	105	TL
11R24.5	CR960A	G/14	146/143L	14.2	8.25	1104	279	3000	6610	720	105	2725	6005	720	105	TL
11R24.5	CR989	G/14	146/143L	15.0	8.25	1104	279	3000	6610	720	105	2725	6005	720	105	TL
11R24.5	MD738	G/14	146/143L	22.6	8.25	1116	279	3000	6610	720	105	2725	6005	720	105	TL
11R24.5	AD757	H/16	149/146L	20.6	8.25	1116	279	3250	7160	830	120	3000	6610	830	120	TL
11R24.5	AS678	H/16	149/146L	14.2	8.25	1104	279	3250	7160	830	120	3000	6610	830	120	TL
11R24.5	CB972	H/16	149/146F	23.0	8.25	1116	279	3250	7160	830	120	3000	6610	830	120	TL
11R24.5	CM973	H/16	149/146L	15.0	8.25	1104	279	3250	7160	830	120	3000	6610	830	120	TL



CM961		CM987		CM980		CM985		CM986				AD156				
Size	Pattern	Ply Rating	Service Index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure								TT/TL
								(kg)	(LBS)	(kPa)	(PSI)	(kg)	(LBS)	(kPa)	(PSI)	
11R24.5	CM980	H/16	149/146L	20.6	8.25	1116	279	3250	7160	830	120	3000	6610	830	120	TL
11R24.5	CM983	H/16	149/146L	20.6	8.25	1116	279	3250	7160	830	120	3000	6610	830	120	TL
11R24.5	CR926D	H/16	149/146L	16.8	8.25	1104	279	3250	7160	830	120	3000	6610	830	120	TL
11R24.5	CR960	H/16	149/146L	14.2	8.25	1104	279	3250	7160	830	120	3000	6610	830	120	TL
11R24.5	CR960A	H/16	149/146L	14.2	8.25	1104	279	3250	7160	830	120	3000	6610	830	120	TL
11R24.5	CR989	H/16	149/146L	15.0	8.25	1104	279	3250	7160	830	120	3000	6610	830	120	TL
11R24.5	MD738	H/16	149/146L	22.6	8.25	1116	279	3250	7160	830	120	3000	6610	830	120	TL
285/75R24.5	AD757	G/14	144/141L	20.6	8.25	1056	283	2800	6175	760	110	2575	5675	760	110	TL
285/75R24.5	AS678	G/14	144/141L	14.2	8.25	1050	283	2800	6175	760	110	2575	5675	760	110	TL
285/75R24.5	CM980	G/14	144/141L	20.6	8.25	1056	283	2800	6175	760	110	2575	5675	760	110	TL
285/75R24.5	CM983	G/14	144/141L	20.6	8.25	1056	283	2800	6175	760	110	2575	5675	760	110	TL
285/75R24.5	CR960A	G/14	144/141L	14.2	8.25	1050	283	2800	6175	760	110	2575	5675	760	110	TL
285/75R24.5	CR989	G/14	144/141L	15.0	8.25	1050	283	2800	6175	760	110	2575	5675	760	110	TL
7.50R20	CR926	G/14	130/128L	14.0	6.0	935	215	1900	4190	830	120	1800	3970	830	120	TT
7.50R20	CR950	G/14	130/128L	13.0	6.0	935	215	1900	4190	830	120	1800	3970	830	120	TT
8.25R20	AZ676	H/16	139/137K	15.0	6.5	974	236	2430	5360	930	135	2300	5070	930	135	TT
8.25R20	CB332	H/16	139/137E	19.0	6.5	974	236	2430	5360	930	135	2300	5070	930	135	TT
8.25R20	CB981	H/16	139/137K	17.0	6.5	974	236	2430	5360	930	135	2300	5070	930	135	TT
8.25R20	CB995	H/16	139/137K	16.0	6.5	974	236	2430	5360	930	135	2300	5070	930	135	TT
8.25R20	CM913	H/16	139/1													




ET550		AT560		AZ676		AT557		MD738				MD777				
Size	Pattern	Ply Rating	Service Index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure								TT/TL
								(kg)	(LBS)	(kPa)	(PSI)	(kg)	(LBS)	(kPa)	(PSI)	
10.00R20	CB981	H/16	146/143K	19.5	7.5	1054	278	3000	6610	830	120	2725	6005	830	120	TT
10.00R20	CB995	H/16	146/143K	18.0	7.5	1054	278	3000	6610	830	120	2725	6005	830	120	TT
10.00R20	CM913	H/16	146/143K	20.0	7.5	1054	278	3000	6610	830	120	2725	6005	830	120	TT
10.00R20	CM922	H/16	146/143K	15.0	7.5	1054	278	3000	6610	830	120	2725	6005	830	120	TT
10.00R20	CM954	H/16	146/143K	16.0	7.5	1054	278	3000	6610	830	120	2725	6005	830	120	TT
10.00R20	CM958	H/16	146/143K	15.0	7.5	1054	278	3000	6610	830	120	2725	6005	830	120	TT
10.00R20	CM983	H/16	146/143K	18.0	7.5	1054	278	3000	6610	830	120	2725	6005	830	120	TT
10.00R20	CM985	H/16	146/143K	19.0	7.5	1054	278	3000	6610	830	120	2725	6005	830	120	TT
10.00R20	CM988	H/16	146/143K	15.5	7.5	1054	278	3000	6610	830	120	2725	6005	830	120	TT
10.00R20	CM998	H/16	146/143K	18.0	7.5	1054	278	3000	6610	830	120	2725	6005	830	120	TT
10.00R20	CR926B	H/16	146/143K	16.0	7.5	1054	278	3000	6610	830	120	2725	6005	830	120	TT
10.00R20	CR960E	H/16	146/143K	19.0	7.5	1054	278	3000	6610	830	120	2725	6005	830	120	TT
10.00R20	CR976A	H/16	146/143K	15.0	7.5	1054	278	3000	6610	830	120	2725	6005	830	120	TT
10.00R20	CR976A	H/16	146/143L	15.0	7.5	1054	278	3000	6610	830	120	2725	6005	830	120	TT
10.00R20	AS668	J/18	149/146J	17.0	7.5	1054	278	3250	7160	930	135	3000	6610	930	135	TT
10.00R20	AZ676	J/18	149/146J	16.0	7.5	1054	278	3250	7160	930	135	3000	6610	930	135	TT
10.00R20	CB332	J/18	149/146D	23.5	7.5	1065	278	3250	7160	930	135	3000	6610	930	135	TT
10.00R20	CB972	J/18	149/146F	24.0	7.5	1065	278	3250	7160	930	135	3000	6610	930	135	TT
10.00R20	CB981	J/18	149/146J	19.5	7.5	1054	278	3250	7160	930	135	3000	6610	930	135	TT
10.00R20	CB995	J/18	149/146J	18.0	7.5	1054	278	3250	7160	930	135	3000	6610	930	135	TT
10.00R20	CM913	J/18	149/146J	20.0	7.5	1054	278	3250	7160	930	135	3000	6610	930	135	TT
10.00R20	CM922	J/18	149/146J	15.0	7.5	1054	278	3250	7160	930	135	3000	6610	930	135	TT
10.00R20	CM954	J/18	149/146J	16.0	7.5	1054	278	3250	7160	930	135	3000	6610	930	135	TT
10.00R20	CM958	J/18	149/146J	15.0	7.5	1054	278	3250	7160	930	135	3000	6610	930	135	TT
10.00R20	CM973	J/18	149/146J	17.5	7.5	1054	278	3250	7160	930	135	3000	6610	930	135	TT
10.00R20	CM983	J/18	149/146J	18.0	7.5	1054	278	3250	7160	930	135	3000	6610	930	135	TT
10.00R20	CM985	J/18	149/146J	19.0	7.5	1054	278	3250	7160	930	135	3000	6610	930	135	TT
10.00R20	CM988	J/18	149/146J	15.5	7.5	1054	278	3250	7160	930	135	3000	6610	930	135	TT
10.00R20	CM998	J/18	149/146J	18.0	7.5	1054	278	3250	7160	930	135	3000	6610	930	135	TT
10.00R20	CR926B	J/18	149/146J	16.0	7.5	1054	278	3250	7160	930	135	3000	6610	930	135	TT
10.00R20	CR960E	J/18	149/146J	19.0	7.5	1054	278	3250	7160	930	135	3000	6610	930	135	TT
10.00R20	CR976A	J/18	149/146J	15.0	7.5	1054	278	3250	7160	930	135	3000	6610	930	135	TT
11.00R20	CB981	H/16	150/147K	20.5	8.0	1085	293	3350	7390	830	120	3075	6780	830	120	TT
11.00R20	CB995	H/16	150/147K	19.0	8.0	1085	293	3350	7390	830	120	3075	6780	830	120	TT
11.00R20	CM913	H/16	150/147K	20.6	8.0	1085	293	3350	7390	830	120	3075	6780	830	120	TT
11.00R20	CM997	H/16	150/147K	20.6	8.0	1085	293	3350	7390	830	120	3075	6780	830	120	TT
11.00R20	CM922	H/16	150/147K	16.0	8.0	1085	293	3350	7390	830	120	3075	6780	830	120	TT
11.00R20	CM958	H/16	150/147K	16.0	8.0	1085	293	3350	7390	830	120	3075	6780	830	120	TT
11.00R20	CM988	H/16	150/147K	16.0	8.0	1085	293	3350	7390	830	120	3075	6780	830	120	TT
11.00R20	CM998	H/16	150/147K	19.0	8.0	1085	293	3350	7390	830	120	3075	6780	830	120	TT
11.00R20	CR926B	H/16	150/147K	17.0	8.0	1085	293	3350	7390	830	120	3075	6780	830	120	TT
11.00R20	CR926E	H/16	150/147K	19.5	8.0	1085	293	3350	7390	830	120	3075	6780	830	120	TT
11.00R20	CR976A	H/16	150/147K	15.5	8.0	1085	293	3350	7390	830	120	3075	6780	830	120	TT
11.00R20	ET550	H/16	150/147K	15.0	8.0	1085	293	3350	7390	830	120	3075	6780	830	120	TT
11.00R20	AD710	J/18	152/149K	19.0	8.0	1085	293	3550	7825	930	135	3250	7165	930	135	TT
11.00R20	AT559	J/18	152/149K	16.0	8.0	1085	293	3550	7825	930	135	3250	7165	930	135	TT
11.00R20	AZ676	J/18	152/149K	16.0	8.0	1085	293	3550	7825	930	135	3250	7165	930	135	TT
11.00R20	CB332	J/18	152/149D	24.5	8.0	1096	293	3550	7825	930	135	3250	7165	930	135	TT
11.00R20	CB901	J/18	152/149J	21.0	8.0	1085	293	3550	7825	930	135	3250	7165	930	135	TT
11.00R20	CB905	J/18	152/149D	24.5	8.0	1096	293	3550	7825	930	135	3250	7165	930	135	TT
11.00R20	CB919	J/18	152/149F	25.5	8.0	1096	293	3550	7825	930	135	3250	7165	930	135	TT
11.00R20	CB972	J/18	152/149F	24.5	8.0	1096	293	3550	7825	930	135	3250	7165	930	135	TT
11.00R20	CB981	J/18	152/149J	20.5	8.0	1085	293	3550	7825	930	135	3250	7165	930	135	TT
11.00R20	CB995A	J/18	152/149J	17.5	8.0	1085	293	3550	7825	930	135	3250	7165	930	135	TT



CM913		CM923		CM973		CM988		CM997				CB999				
Size	Pattern	Ply Rating	Service Index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure								TT/TL
								(kg)	(LBS)	(kPa)	(PSI)	(kg)	(LBS)	(kPa)	(PSI)	
11.00R20	CM333	J/18	152/149K	20.0	8.0	1085	293	3550	7825	930	135	3250	7165	930	135	TT
11.00R20	CM335	J/18	152/149K	20.0	8.0	1085	293	3550	7825	930	135	3250	7165	930	135	TT
11.00R20	CM913A	J/18	152/149K	18.6	8.0	1085	293	3550	7825	930	135	3250	7165	930	135	TT
11.00R20	CM997	J/18	152/149J	20.6	8.0	1085	293	3550	7825	930	135	3250	7165	930	135	TT
11.00R20	CM922	J/18	152/149K	16.0	8.0	1085	293	3550	7825	930	135	3250	7165	930	135	TT
11.00R20	CM958	J/18	152/149K	16.0	8.0	1085	293	3550	7825	930	135	3250	7165	930	135	TT
11.00R20	CM961	J/18	152/149K	20.0	8.0	1085	293	3550	7825	930	135	3250	7165	930	135	TT
11.00R20	CM988	J/18	152/149K	16.0	8.0	1085	293	3550	7825	930	135	3250	7165	930	135	TT
11.00R20	CM998A	J/18	152/149J	17.5	8.0	1085	293	3550	7825	930	135	3250	7165	930	135	TT
11.00R20	CR926B	J/18	152/149K	17.0	8.0	1085	293	3550	7825	930	135	3250	7165	930	135	TT
11.00R20	CR926E	J/18	152/149K	19.5	8.0	1085	293	3550	7825	930	135	3250	7165	930	135	TT
11.00R20	CR976A	J/18	152/149K	15.5	8.0	1085	293	3550	7825	930	135	3250	7165	930	135	TT
11.00R20	ES660	J/18	152/149K	15.5	8.0	1085	293	3550	7825	930	135	3250	7165	930	135	TT
11.00R20	ET550	J/18	152/149K	15.0	8.0	1085	293	3550	7825	930	135	3250	7165	930	135	TT
12.00R20	AD710	J/18	154/151K	21.0	8.5	1125	315	3750	8270	830	120	3450	7610	830	120	TT
12.00R20	AZ676	J/18	154/151K	17.5	8.5	1125	315	3750	8270	830	120	3450	7610	830	120	TT
12.00R20	CB332	J/18	154/151D	25.5	8.5	1136	315	3750	8270	830	120	3450	7610	830	120	TT
12.00R20	CB901	J/18	154/151F	22.0	8.5	1125	315	3750	8270	830	120	3450	7610	830	120	TT
12.00R20	CB905	J/18	154/151D	24.5	8.5	1136	315	3750	8270	830	120	3450	7610	830	120	TT
12.00R20	CB919	J/18	154/151F	25.5	8.5	1136	315	3750	8270	830	120	3450	7610	830	120	TT



CM998		CB981		CR926B		CR926D		CB332		CB972		CB901				
Size	Pattern	Ply Rating	Service Index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure								TT/TL
								(kg)	(LBS)	(kPa)	(PSI)	(kg)	(LBS)	(kPa)	(PSI)	
12.00R24	CB972	L/20	160/157C	25.0	8.5	1226	315	4500	9920	900	131	4125	9090	900	131	TT
12.00R24	CB972E	L/20	160/157C	32.0	8.5	1238	315	4500	9920	900	131	4125	9090	900	131	TT
12.00R24	CM912	L/20	160/157K	19.0	8.5	1226	315	4500	9920	900	131	4125	9090	900	131	TT
12.00R24	CM913A	L/20	160/157K	19.0	8.5	1226	315	4500	9920	900	131	4125	9090	900	131	TT
12.00R24	CR926	L/20	160/157K	16.0	8.5	1226	315	4500	9920	900	131	4125	9090	900	131	TT
12.00R24	CR926B	L/20	160/157K	19.0	8.5	1226	315	4500	9920	900	131	4125	9090	900	131	TT
12.00R24	MD752	L/20	160/157K	16.0	8.5	1226	315	4500	9920	900	131	4125	9090	900	131	TT
Light Truck Tires																
215/85R16LT	CM938	F/12	120/118L	10.5	6.00J	772	216	1400	3085	600	87	1320	2910	600	87	TL
8.5R17.5	CR950	F/12	121/120L	12.0	6.00	802	215	1450	3200	625	91	1400	3090	625	91	TL
9.5R17.5	CR950	H/16	143/141J	13.0	6.75	842	240	2725	6005	875	128	2575	5675	875	128	TL
9.5R17.5	MD738	H/16	143/141J	16.5	6.75	842	240	2725	6005	875	128	2575	5675	875	128	TL
245/70R17.5	CM986	H/16	136/134M	15.0	7.50	789	248	2240	4940	850	123	2120	4675	850	123	TL
245/70R17.5	CR960A	H/16	136/134M	13.0	7.50	789	248	2240	4940	850	123	2120	4675	850	123	TL
245/70R17.5	CM986	J/18	143/141J	15.0	7.50	789	248	2725	6005	875	128	2575	5675	875	128	TL
245/70R17.5	CR960A	J/18	143/141J	13.0	7.50	789	248	2725	6005	875	128	2575	5675	875	128	TL
205/75R17.5	CM986	F/12	122/120M	14.0	6.00	753	205	1500	3305	675	98	1400	3085	675	98	TL
205/75R17.5	CR960A	F/12	122/120M	12.0	6.00	753	205	1500	3305	675	98	1400	3085	675	98	TL
205/75R17.5	CM986	G/14	124/122M	14.0	6.00	753	205	1600	3525	750	109	1500	3305	750	109	TL
205/75R17.5	CR960A	G/14	124/122M	12.0	6.00	753	205	1600	3525	750	109	1500	3305	750	109	TL
215/75R17.5	CM958	G/14	126/124M	13.0	6.00	767	211	1700	3750	760	110	1600	3525	760	110	TL
215/75R17.5	CM986	G/14	126/124M	14.5	6.00	767	211	1700	3750	760	110	1600	3525	760	110	TL
215/75R17.5	CR950	G/14	126/124M	13.0	6.00	767	211	1700	3750	760	110	1600	3525	760	110	TL
215/75R17.5	CR960A	G/14	126/124M	12.5	6.00	767	211	1700	3750	760	110	1600	3525	760	110	TL
215/75R17.5	CR976A	G/14	126/124M	12.5	6.00	767	211	1700	3750	760	110	1600	3525	760	110	TL
215/75R17.5	CM958	H/16	135/133J	13.0	6.00	767	211	2180	4805	850	123	2060	4540	850	123	TL
215/75R17.5	CM986	H/16	135/133J	14.5	6.00	767	211	2180	4805	850	123	2060	4540	850	123	TL
215/75R17.5	CR950	H/16	135/133J	13.0	6.00	767	211	2180	4805	850	123	2060	4540	850	123	TL
215/75R17.5	CR960A	H/16	135/133J	12.5	6.00	767	211	2180	4805	850	123	2060	4540	850	123	TL
215/75R17.5	CR976A	H/16	135/133J	12.5	6.00	767	211	2180	4805	850	123	2060	4540	850	123	TL
225/75R17.5	CM986	F/12	126/125M	14.5	6.75	783	226	1700	3750	675	98	1650	3640	675	98	TL
225/75R17.5	CR960A	F/12	126/125M	12.5	6.75	783	226	1700	3750	675	98	1650	3640	675	98	TL
225/75R17.5	CM986	G/14	129/127M	14.5	6.75	783	226	1850	4080	725	105	1750	3860	725	105	TL
225/75R17.5	CR960A	G/14	129/127M	12.5	6.75	783	226	1850	4080	725	105	1750	3860	725	105	TL
235/75R17.5	CM986	F/12	130/128M	15.4	6.75	797	233	1900	4190	725	106	1800	3970	725	106	TL
235/75R17.5	CR960A	F/12	130/128M	13.3	6.75	797	233	1900	4190	725	106	1800	3970	725	106	TL
235/75R17.5	CM986	G/14	132/130M	15.4	6.75	797	233	2000	4410	775	112	1900	4190	775	112	TL
235/75R17.5	CR960A	G/14	132/130M	13.3	6.75	797	233	2000	4410	775	112	1900	4190	775	112	TL
235/75R17.5	CM986	H/16	143/141J	15.4	6.75	797	233	2725	6005	875	128	2575	5675	875	128	TL
235/75R17.5	CR960A	H/16	143/141J	13.3	6.75	797	233	2725	6005	875	128	2575	5675	875	128	TL
8R19.5	CR960A	F/12	124/122L	13.0	6.00	859	203	1600	3525	760	110	1500	3305	760	110	TL
225/70R19.5	CM986	F/12	125/123M	15.0	6.75	811	226	1650	3640	660	95	1550	3415	660	95	TL
225/70R19.5	CR960A	F/12	125/123M	13.0	6.75	811	226	1650	3640	660	95	1550	3415	660	95	TL
225/70R19.5	CR976A	F/12	125/123M	13.0	6.75	811	226	1650	3640	660	95	1550	3415	660	95	TL
225/70R19.5	CR976A	G/14	128/126M	13.0	6.75	811	226	1800	3970	760	110	1700	3750	760	110	TL
245/70R19.5	CM986	G/14	133/131M	15.4	7.50	839	248	2060	4540	760	110	1950	4300	760	110	TL
245/70R19.5	CR960A	G/14	133/131M	13.0	7.50	839	248	2060	4540	760	110	1950	4300	760	110	TL
245/70R19.5	CR976A	G/14	133/131M	13.0	7.50	839	248	2060	4540	760	110	1950	4300	760	110	TL
245/70R19.5	CM986	H/16	136/134M	15.4	7.50	839	248	2240	4940	830	120	2120	4675	830	120	TL
245/70R19.5	CR960A	H/16	136/134M	13.0	7.50	839	248	2240	4940	830	120	2120	4675	830	120	TL
245/70R19.5	CR976A	H/16	136/134M	13.0	7.50	839	248	2240	4940	830	120	2120	4675	830	120	TL
265/70R19.5	CR976A	G/14	137/134M	14.0	7.50	867	262	2300	5070	760	110	2120	4675	760	110	TL
265/70R19.5	CR976A	H/16	140/138M	14.0	7.50	867	262	2500	5510	775	112	2360	5200	775	112	TL
265/70R19.5	CR976A	J/18	143/141J	14.0	7.50	867	262	2725	6005	850	123	2575	5675	850	123	TL

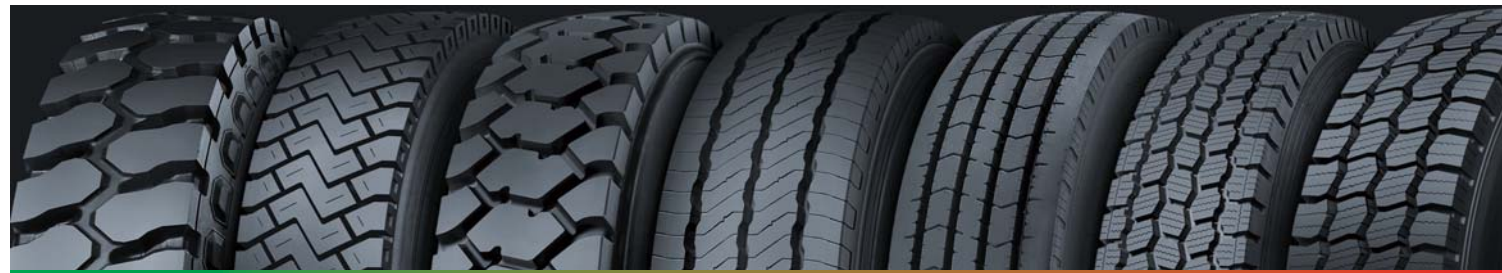

CB905		CB995		CB919		CR906		CR960E		AZ780		AZ782				
Size	Pattern	Ply Rating	Service Index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure								TT/TL
								(kg)	(LBS)	(kPa)	(PSI)	(kg)	(LBS)	(kPa)	(PSI)	
285/70R19.5	CM986	G/14	140/137M	16.0	8.25	895	283	2500	5510	725	105	2300	5070	725	105	TL
285/70R19.5	CR960A	G/14	140/137M	14.5	8.25	895	283	2500	5510	725	105	2300	5070	725	105	TL
285/70R19.5	CM986	H/16	146/144K	16.0	8.25	895	283	3000	6610	850	123	2800	6175	850	123	TL
285/70R19.5	CR960A	H/16	146/144K	14.5	8.25	895	283	3000	6610	850	123	2800	6175	850	123	TL
7.50R15	CM958	H/16	135/133J	13.0	6.0	780	212	2180	4806	850	123	2060	4541	850	123	TT
8.25R15	CM958	J/18	143/141J	14.0	6.50	836	234	2725	6005	850	123	2575	5675	850	123	TT
6.50R16	AZ676	F/12	110/105L	9.5	5.50F	750	185	1060	2335	670	97	925	2040	670	97	TT
6.50R16	CR926	F/12	110/105L	9.5	5.50F	750	185	1060	2335	670	97	925	2040	670	97	TT
7.00R16	AZ676	G/14	118/114L	11.0	5.50F	775	200	1320	2910	770	112	1180	2600	770	112	TT
7.00R16	CB332	G/14	118/114J	18.0	5.50F	785	200	1320	2910	770	112	1180	2600	770	112	TT
7.00R16	CM958	G/14	118/114L	14.0	5.50F	785	200	1320	2910	770	112	1180	2600	770	112	TT
7.00R16	CM988	G/14	118/114L	14.0	5.50F	785	200	1320	2910	770	112	1180	2600	770	112	TT
7.00R16	CM998	G/14	118/114L	15.5	5.50F	785	200	1320	2910	770	112	1180	2600	770	112	TT
7.00R16	CR926	G/14	118/114M	11.0	5.50F	775	200	1320	2910	770	112	1180	2600	770	112	TT
7.50R16	CB999	D/8	112/110N	15.0	6.00G	815	215	1120	2470	460	67	1060	2340	460	67	TT
7.50R16	CB999	E/10	116/114N	15.0	6.00G	815	215	1250	2755	560	81	1180	2600	560	81	TT
7.50R16	AZ676	G/14	122/118L	12.0	6.00G	805	215	1500	3305	770	112	1320	2910	770	112	TT
7.50R16	CB332	G/14	122/118J	18.0	6.00G	815	215	1500	3305	770	112	1320	2910	770	112	TT
7.50R16	CB981	G/14	122/118L	16.0	6.00G	815	215	1500	3305	770	112	1320	2910	770	112	TT
7.50R16	CB995	G/14	122/118L	16.0	6.00G	815	215	1500	3305	770	112	1320				